

Chapter 1 Introduction

TXF1272 Series

X-ray high voltage power supply | 225kV,6kW Compact and Bipolar Output Configuration



- 160kV,225kV,320kV and 450kV Mode
- 6kW
- Build in PFC circuit
- Integrated double filament power supply
- Solid encapsulation
- USB, Ethernet and RS232 ports

Product Introduction:

Teslaman TXF1272 series X-ray high voltage power supply is a compact power supply with negative, positive, or bipolar output options, with a power of 6.0 kW, and an output voltage range of 160 kV to 450 kV, suitable for various application needs. The power supply adopts an active power factor correction circuit, with a high power factor and low input current, and reduces line-related electromagnetic interference to a minimum. TXF1272 adopts a proprietary inverter topology technology to make the power supply more efficient and higher in power density. The high-voltage part of the power supply is packaged in a solid-state way to reduce volume and weight and improve the reliability and maintenance convenience of the product. The power supply uses DSP technology based on SMT control circuits and provides various interfaces such as USB, RS-232, Ethernet, and analog signals to facilitate integration into OEM systems. The power supply has two DC outputs, and the stable emission current regulation circuit controls the filaments power supply, providing precise and stable current to the X-ray tube. In addition, the power supply also has a comprehensive fault diagnosis circuit, arc monitoring, arc extinguishing, and arc counting functions.

Typical Applications:

Non-destructive testing
X-ray scanning
Secure applications
Medical applications
AI Visual Recognition

Specification Description:

Input Voltage	208 or 400VAC \pm 10%, three phase, 47-63 Hertz, passive power factor corrected
Input Current	<25 amps per phase for 208VAC. <15 amps per phase for 400VAC.
Output Voltage	Accuracy: 0.25% Stability: \leq 0.1% per 8 hours, after 1 hour warm up Load: \pm 0.1% of rated output voltage for a full load change Line: \pm 0.1% of rated output voltage over specified input voltage range
Temperature Coefficient	50ppm/ $^{\circ}$ C

Emission Current	Temperature coefficient: 100ppm/°C Load:±0.1% of rated output current for a change from 30% to 100% of rated output voltage Line: ±0.1% of rated output current over specified input voltage range
Filament	Output:0-6 amps at a compliance of 10Vdc, maximum Dual Focal Spot:Small and large, selectable via interface signal Configuration: DC filament drive. Closed loop emission control regulates filament setting to provide desired X-Ray tube emission current
Polarity	Specify negative or positive when ordering
Environment	Work:0°C To +50°C.Storage:-40°C To +85°C.
Mains Input Connector	MS3106A24-11S
Interface Connector	Digital—Ethernet, RS-232 and USB Analog—25 pin connector
Cooling	Forced air

Description of Model Code

The model code represents the performance and parameters of the power supply, which are:Maximum output voltage in kV;

Maximum output power in W;

Output polarity, P for positive output, N for negative output;

TXF1272 P 225 - 6000

| | | |

Model Polarity Maximum Maximum

voltage power

J1 MAIN AND AUXILIARY INPUT POWER TYPE 97-3102A-24-11P (Single Phase Units)

PIN	SIGNAL	PARAMETERS
A	Auxiliary AC Line Power	AC180-264V
B	Auxiliary Ground	Ground
C	Auxiliary AC Neutral	Neutral
D	Main AC Line Power	AC180-264V
E	Main Ground	Ground
F	Main AC Neutral	Neutral

JB2 AUXILIARY AC INPUT POWER

PIN	SIGNAL	PARAMETERS
A	Line 1	208Vac, ±10%, 50/60Hz (source 3 phase L1, L2)
B	Line 2	208Vac, ±10%, 50/60Hz (source 3 phase L1, L2)
C	GND	Ground

Note: Use 4 conductor cable or single isolated wires rated no less than 600Vac, 30 amps (10AWG, minimum).

HV CONNECTOR—J3 R24/R28:

PIN	SIGNAL	PARAMETERS
C	HV Output	160kV and 320kV - R24 connector 225kV and 450kV - R28 connector
S	Small Filament Output	0 to 6A @ 10VDC
L	Large Filament Output	0 to 6A @ 10VDC

USB DIGITAL INTERFACE - JB6 PIN USB "B" CONNECTOR:

PIN	SIGNAL	PARAMETERS
1	VBUS	+5VDC
2	D-	Data -
3	D+	Data +
4	GND	Ground

ETHERNET DIGITAL INTERFACE - JB7 8 PIN RJ45 CONNECTOR:

PIN	SIGNAL	PARAMETERS
1	TX+	Transmit Data+
2	TX-	Transmit Data-
3	RX+	Receive Data+
4	NC	No Connection
5	NC	No Connection
6	RX-	Receive Data
7	NC	No Connection
8	NC	No Connection


RS-232 DIGITAL INTERFACE JB8 9 PIN FEMALE D CONNECTOR:

PIN	SIGNAL	PARAMETERS
1	NC	No Connection
2	TX out	Receive Data
3	RX in	Transmit Data
4	NC	No Connection
5	SGND	Ground
6	NC	No Connection
7	NC	No Connection
8	NC	No Connection
9	NC	No Connection


JB9 ANALOG INTERFACE —25 PIN D CONNECTOR

PIN	SIGNAL	PARAMETERS
1	Power Supply Fault	Low, sum of faults, HVPS detected a fault, open collector, 50V @ 10mA max
2	mA Program	0 to 10V FS Z in = 10M ohms
3	kV Program	0 to 10V FS Z in = 10M ohms
4	Filament Limit L/S Ref.*	0 to 10V FS Z in = 10M ohms
5	Filament Preheat L/S Ref.*	0 to 10V FS Z in = 10M ohms
6	kV Monitor	0 to 10V FS Z out = 4.99k ohms
7	mA Monitor	0 to 10V FS Z out = 4.99k ohms
8	Filament Current Monitor*	0 to 10V FS Z out = 4.99k ohms
9	Signal Ground	Ground
10	X-Ray Enable	+24Vdc = X-Ray ON, connect to pin 14 with dry contact relay
11	Filament ON*	Filament ON status, low, filament is ON open collector 50V, @ 10mA max
12	Interlock 1	Active low, interlock is closed, safe to enable HV
13	Interlock 2	Active low, interlock is closed, safe to enable HV
14	+24Vdc	+24Vdc @ 100mA, maximum
15	Filament Enable*	Active low, turn filament ON
16	Filament Control*	Active low, filament is regulated by ECR (HV must be ON). Not active, the filament is regulated by the preheat reference
17	Filament L/S Select	Filament selection large or small, low = small spot is selected
18	Filament L/S Confirm	Open collector, 50V @ 10mA max Filament selection confirm, low = small spot is selected
19	HVPS RDY	Low = HVPS ready, open collector, 50V @ 10mA max
20	X-Ray ON	X-Ray ON status, low = X-Rays are ON open collector, 50V @ 10mA max
21	Interlock Status	Low, interlocks are closed, can enable HV open collector, 50V @ 10mA max
22	GND	Digital Ground
23	X-Ray ON Pre-Warn	Pre-warning, low, before X-Ray ON open collector, 50V @ 10mA max
24	Reset	Active low, minimum 10mS transition
25	Arc fault	Low, arc fault, the HVPS has detected an arc open collector, 50V @ 10mA max


Dimensions: mm

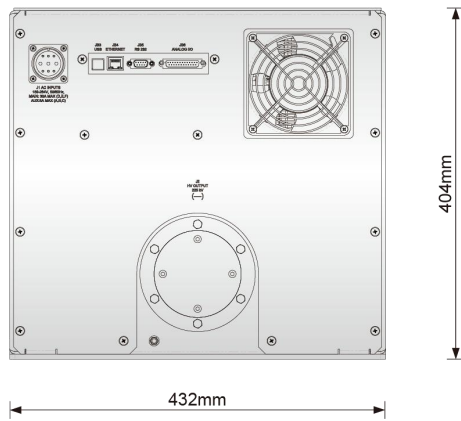

Front view

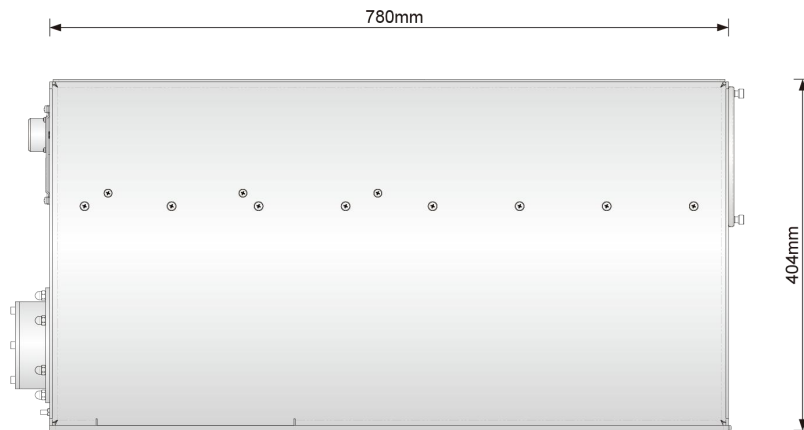

Side view

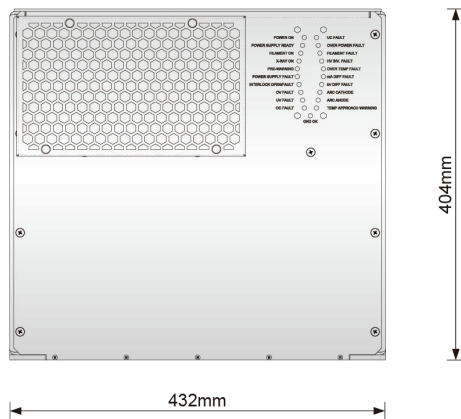

Rear view