

# TESC7036 Series

**Electrostatic Chuck Power Supply |  $\pm 10\text{kV}$ , 200W, 20ms switching time, Multi-channel independent output, compact design**



- +24V DC Input
- Multi-channel independent output,  $\pm 10\text{kV}$  each channel
- Switchable polarity, 20ms switching time
- Polarity hot switchable
- Analog/RS485 digital interface
- 100nf load detection

## Introduction:

The TESC7036 series high-voltage power supply from Teslaman is specially designed for the application of electrostatic chucks, of outputting precise voltages within 10ms and switching polarity within 1s, thus providing protection for semiconductor processes. It features reversible ground-referenced polarity and can also output floating-ground bipolar voltages with corresponding floating-ground interfaces. It also has comprehensive fault diagnosis and status monitoring functions, which can transmit data to the interface. Its packaging design is compact and lightweight, suitable for OEM.

## Application:


E-Chuck.

## Specification:


<b>Input</b>	+24VDC $\pm 5\%$ , 5A.
<b>Input port</b>	125 pins.
<b>Output channels</b>	Multiple output, Independent control.
<b>Output voltage range</b>	-10kV ~ +10kV.
<b>Output current</b>	Setting range 0-35mA (load $< 1\mu\text{F}$ ).
<b>Voltage accuracy</b>	$\pm 1\%$ of rated value.
<b>Ripple</b>	Typical $< 100\text{mV}$ p-p (load $< 10\text{nf}$ , 0-1MHz).
<b>Pass origin</b>	Yes.
<b>Over-shoot</b>	Typical $< 2\text{V}$ (load $< 10\text{nf}$ , from -10kV to +10kV).
<b>Output delay</b>	$< 3\text{ms}$ .
<b>Switching period</b>	Typical 20ms (load $< 10\text{nf}$ , from -10kV to +10kV).
<b>Frequency</b>	Typical 50Hz (load $< 10\text{nf}$ , from -10kV to +10kV).
<b>Output impedance</b>	$> 20\text{k}\Omega$ (each channel).
<b>Voltage display</b>	Resolution=1V, Accuracy better than $\pm 50\text{V}$ .
<b>Current display</b>	Resolution= $10\mu\text{A}$ , Accuracy=actual output $\pm 100\mu\text{A}$ , bias $\pm 2\%$ .
<b>Stability</b>	2V/s.
<b>Line regulation</b>	$< 0.1\%$ when input change within 10%.
<b>Load regulation</b>	$< 1.3\%$ from 0 to full load.
<b>Protection</b>	Input over/under voltage, over current; output over-voltage, over-current and over-temperature protection.
<b>Function</b>	Voltage and current setting, d-chuck, etc.




# Dimensions: mm

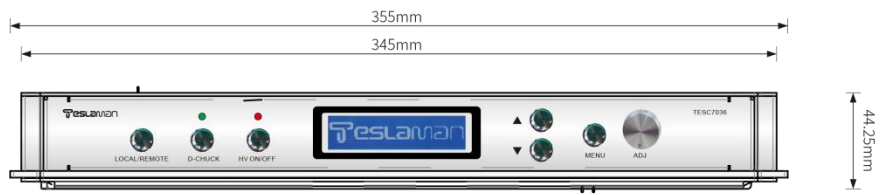

Front View

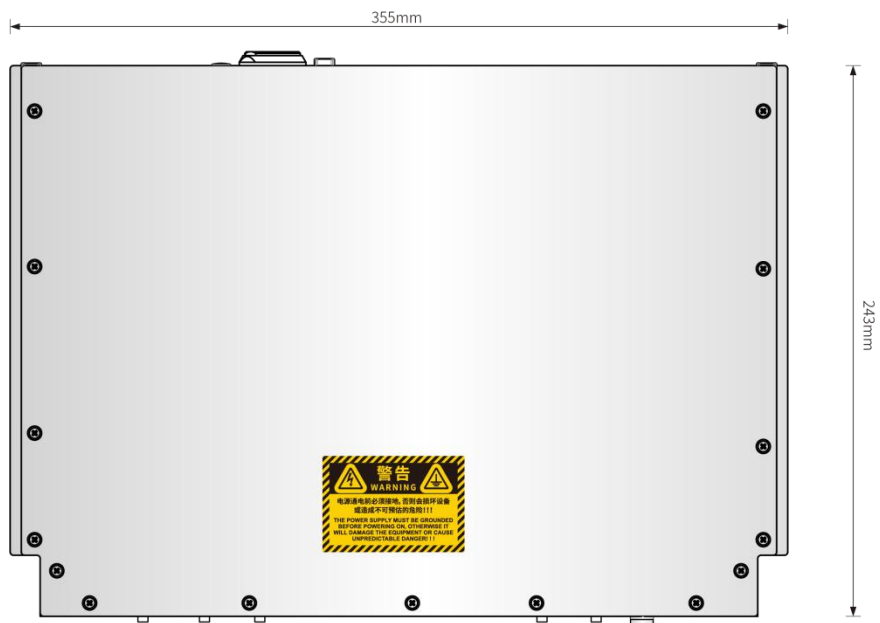

Top View

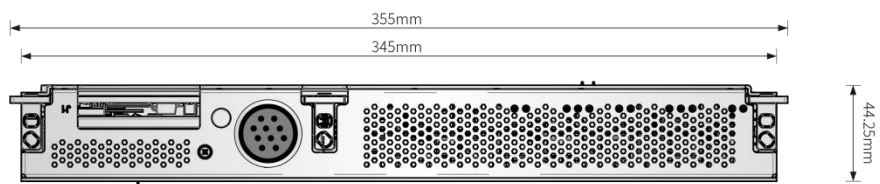

Rear View

# Output Waveform

